

旭阳铝粉(膏)



产品介绍

本产品采用国标铝为原材料,产品具有活性铝含量高、气孔紧密均匀、低堆积密度、高强度、原料好、发气足、稳定性好等优点。




产品工艺

旭阳生产的加气铝粉(膏),直接以铝水作为原材料,避免了二次熔铝对铝的破坏,满足了不同行业在活性铝、导电率、延展性、硬度等方面的需求。




铝水



雾化



球形铝粉




球磨



铝粉膏



产品应用

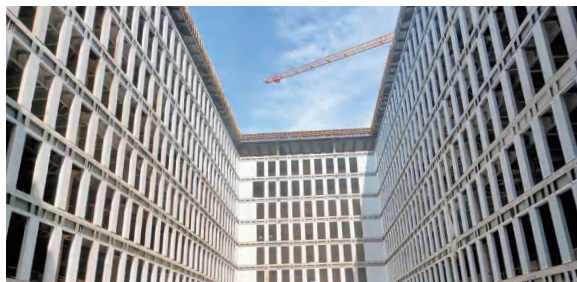

AAC砌块、ALC板



400-999-2508

www.ahxuyang.cn

xuyang@ahxuyang.cn



产品型号

01 加气铝粉

型号	铝含量(%)	中位径(μm)	200目筛余率(%)	适用容重(kg/m ³)
F9506	≥95	20-30	<2	500-600
F9505	≥95	10-15	<1	400-500
F9504	≥95	5-8	<0.5	300-400
F9502	≥95	3-5	<0.1	100-200
W9506	≥95	20-25	<2	500-600
W9505	≥95	10-15	<1	400-500

02 加气铝膏

型号	铝含量(%)	中位径(μm)	200目筛余率(%)	适用容量(kg/m ³)
Y6206	≥60	20-30	<2	500-600
Y7206	≥70	20-30	<2	500-600
Y8206	≥80	20-30	<2	500-600
S6105	≥60	10-15	<1	400-500
S7105	≥70	10-15	<1	400-500
S8105	≥80	10-15	<1	400-500
Y6105	≥60	10-15	<1	400-500
Y7105	≥70	10-15	<1	400-500
Y8105	≥80	10-15	<1	400-500
Y6104	≥60	5-8	<0.5	300-400
Y7104	≥70	5-8	<0.5	300-400
Y8104	≥80	5-8	<0.5	300-400
Y6102	≥60	3-5	<0.1	100-200
Y7102	≥70	3-5	<0.1	100-200
Y8102	≥80	3-5	<0.1	100-200

注意事项

1. 产品应贮存在干燥通风阴凉的库房内。
2. 产品开封后应尽快使用,如无法一次性使用完,应立即将其密封好。
3. 应与水、酸、碱、腐蚀品、热源、火源隔离。
4. 运输途中应防止暴晒,雨淋,防高温等。
5. 自生产之日起,在上述运输与贮存条件下,铝粉膏贮存期限为一年。